

Model 2241 LA

1,3 A max out • 90-264 VAC input

- 3-step charge control with current detection as charge termination
- Universal input voltage (90-264 VAC)
- 2-pin IEC 320 mains connector
- Waterproof (IP67) version available
- Approvals:

- Medically certified

Safety: EN 60601-1 ed. 3.1

Home healthcare EN 60601-1-11

EMC: EN 60601-1-2 ed. 4

- UL approved

- Custom specifications on request:

Charging parameters, connectors, cords, logo print, housing/open frame/IP rating and certificates. For more information: [custom design info sheet](#)

Notes:

Plug-in/Desktop unit

Exchangeable AC and DC plugs

Standard DC output cord (exch. DC plugs):

Female conn. L 1.8m, AWG 20, UL 2468

Order plugs & mains cord separately



Available versions

On request

6V / 1,3A





12V / 1A

24V / 0,5A

36V / 0,35A

48V / 270mA

Exchangeable AC plugs



Exchangeable DC plugs



Art. no. 131122

3627
L: 14
Dy1: 5
Dy2: 6.2
Di: 1.97



Art. no. 131119

3630
L: 12
Dy: 5.5
Di: 2.1



Art. no. 131192

3630A
L: 12
Dy: 5.5
Di: 2.1



Art. no. 131121

3635
L: 9
Dy: 3.8
Di: 1.3



Art. no. 131123

3215
L: 14.5
Dy: 3.5



Art. no. 131120

3617
L: 12
Dy: 5.5
Di: 2.5



Art. no. 131193

3618
L: 9.5
Dy: 5.5
Di: 2.45



Art. no. 131124

3620
L: 11.5
Dy: 2.5

EIAJ RC5320A plugs



Art. no. 131128

53201
L: 9.5
Dy: 2.35
Di: 0.7
Class I



Art. no. 131126

53202
L: 9.5
Dy: 4
Di: 1.7
Class II



Art. no. 131127

53203
L: 9.5
Dy: 4.75
Di: 1.7
Class III



Art. no. 131128

53204
L: 9.5
Dy: 5.5
Di: 3.3
Dp: 1.0
Class IV

Push on terminals



Type 131341

Exchangeable plug packs

Pack 1: Type 9000-200
All 36-series plugs (8 pcs)

Pack 2: Type 9000-201
All EIAJ plugs (4 pcs)

Pack 3: Type 9000-202
1 x all plugs (12 pcs)



Exchangeable DC cable connectors

From charger

DC Cord with EMI Core
Art.no. 131685
Male connector
Length 1.05 meter Coax




To battery

DC Cord with Battery Clips
Art.no. 131686
Female connector, Fuse holder
Length 0.6 meter Coax



DC Cord with Ring Terminal
Art.no. 131687
Female connector, Fuse holder
Length 0.6 meter Coax
Ring \varnothing 8.4 mm
2 x 16 AGW, UL2468

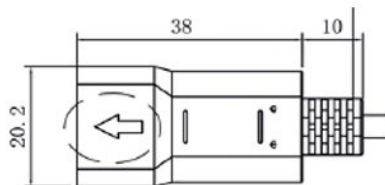

AC cord 2-pin

2-pin IEC 60320

AUS art.no. 013108

EU art.no. 131306

UK art.no. 131148

US art.no. 013368

